

Features:

- 850nm multimode oxide isolated VCSEL
- Operates up to 5.0 Gbps
- TO-46 tilt window TO-CAN prealigned into LC sleeve
- Packaged with a monitor photodiode
- 3dB attenuated receptacle



COTSWORKS 850nm 5G VCSEL TOSA is suited to a wide variety of multimode fiber applications.



COMMERCIAL AEROSPACE




MILITARY AEROSPACE



MILITARY TACTICAL



SUBSEA NETWORKING



RADAR & SENSING



OIL & EXPLORATION


Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit	Notes
Storage Temperature	T _{sto}	-55	105	°C	
Case Operating Temperature	T _{OP}	-55	100	°C	
Laser Reverse Voltage	V _R	-	5	V	
Laser Forward Current	I _F	-	15	mA	
Hand Lead Soldering Temperature	-	-	260	°C	(1)
ESD Exposure (Human Body Model)	-	-	225	V	(2)

Notes:

- 1) Hand solder for 10 seconds.
- 2) Proper ESD conditions should be employed while attaching to host board.





Opto-Electronic Specifications

(Unless otherwise noted, $-55^{\circ}\text{C} \leq T_C \leq 100^{\circ}\text{C}$.)


Parameter	Test Condition	Symbol	Min.	Typ.	Max.	Unit	Notes
VCSEL							
Data Rate	-	DR	-	-	5.0	Gbps	
Optical Output Power	$I_F = 7.5\text{mA}$ 50/125 μm MMF 62.5/125 μm MMF $T_C = 25^{\circ}\text{C}$	P_F	0.90	-	1.5	mW	
Coupling Efficiency	$I_F = 7.5\text{mA}$ $T_C = 25^{\circ}\text{C}$	PO_PCT	70	-	-	%	(2)
Threshold Current	$T_C = 25^{\circ}\text{C}$	I_{TH}	-	0.75	2	mA	
Threshold Current Temperature Variation	-	ΔI_{TH}	-	-	1.7	mA	(3)
Slope Efficiency	$T_C = 25^{\circ}\text{C}$	η	0.12	0.175	0.2	W / A	
Center Wavelength	-	λ_C	830	850	860	nm	(1)
Center Wavelength Temperature Variation	-	$\Delta\lambda_C / \Delta T$	-	0.06	-	nm / $^{\circ}\text{C}$	
RMS Spectral Width	-	$\Delta\lambda$	-	-	0.65	nm	(1)
Laser Forward Voltage	$I_F = 7.5\text{mA}$ $T_C = 25^{\circ}\text{C}$	V_F	-	2.1	2.4	V	
Laser Reverse Voltage	$I_R = 10\mu\text{A}$	V_R	5	10	-	V	
Relative Intensity Noise	$I_F = 7.5\text{mA}$	RIN12OMA	-	-130	-122	dB / Hz	(4)
Series Resistance	-	R	50	70	85	Ω	(1)
Optical Return Loss	-	ORL	12	-	-	dB	
Encircled Flux Diameter	-	EF 4.5 μm	-	-	30	%	(5)
		EF 19 μm	86	-	-		
Bias Current Range	-	I_F	6	-	12	mA	
High Temperature Power Droop	-	P_{DROOP}	-0.8	-	0	dB	(7)
Transmitter Dispersion Penalty	-	TDP	-	-	3.8	dB	(1)
Monitor Photodiode							
MPD Current	$V_R = 3\text{V}$	I_{PD}	90	-	200	μA	(1)
MPD Power Tracking	-	$\Delta P / \Delta T$	0.8	-	1.2	dB	
MPD Dark Current	$P_F = 0\text{mW}$ $V_R = 3\text{V}$	I_{DARK}	-	-	20	nA	
MPD Reverse Voltage	$P_F = 0\text{mW}$ $I_R = 10\mu\text{A}$	BVR_{PD}	30	115	-	V	(6)
Monitor Capacitance	$V_R = 0\text{V}$ Freq = 1MHz	C_{PD}	-	75	100	pF	
	$V_R = 3\text{V}$ Freq = 1Mhz		-	40	55		
Notes:							
1) Test condition is over all operating condition temperatures with tracked back monitor current found at 7.5 mA at 25C with a 15 mA clamp.							
2) PO_PCT is defined as the ratio of the coupled power into a 50/125 μm fiber to the total power output from the optical front end as measured on a large area detector.							
3) Operation outside of the specified range may result in the threshold current exceeding the maximums defined in the electro-optical characteristics table. ΔI_{TH} is the maximum deviation from the 25 $^{\circ}\text{C}$ value.							
4) RIN12 is measured using the OMA technique with 12dB return.							
5) Encircled flux is measured per TIA-455-203 at 7.5 mA average current.							
6) To prevent VCSEL damage, short the VCSEL anode and cathode during BVR testing of the photodiode.							
7) Droop is the fiber coupled power difference in dB from a tracked condition to the clamped condition.							
8) Settling time is tracked by center wavelength stabilizing to within 5% of the final value.							




Pin Identification

PIN #	Description	Pin Diameter
1	VCSEL Cathode	18 mil
2	VCSEL Anode	18 mil
3	Monitor Diode Cathode	18 mil
4	Monitor Diode Anode (Case)	18 mil

Notes:
 1) Mechanical dimensions shown here are in units of inches [mm].

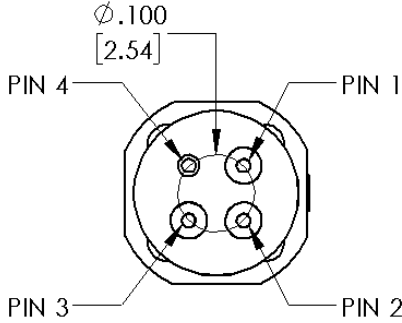

Standard Mechanical Dimensions

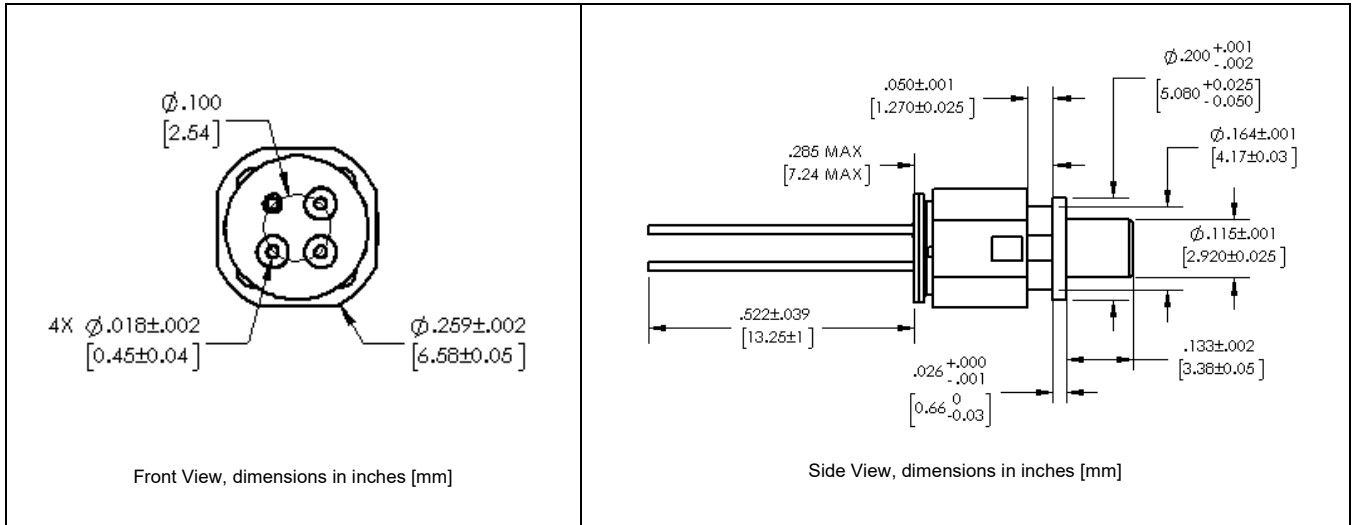

Warnings:

Handling Precautions: This device is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended.

Laser Safety: Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation

Ordering Information

Contact COTSWORKS Sales for information and pricing.

Contact COTSWORKS for mechanical dimensional information, lead times and configuration options.

COTSWORKS and the COTSWORKS logo are registered trademarks of COTSWORKS, INC.
 COTSWORKS reserves the right to change, alter, or revise this document without notice unless otherwise agreed to.